



FT
SERIES
BATTERY
GUIDE

FULL THROTTLE
BATTERY

PREMIUM AGM BATTERIES FOR YOUR PREMIUM RIDE.

▶ **ULTRA-TOUGH ABS CASING**


VIBRATION AND PUNCTURE RESISTANT, EPOXY SEALED ABS CASE SAFEGUARDS AGAINST SPILLS.

▶ **HIGH-QUALITY BRASS TERMINALS**

TERMINAL CONNECTIONS COMPOSED OF TIN-COATED BRASS RESULT IN HIGH CONDUCTIVITY AND LOW RESISTANCE FOR COOLER OPERATION AND FASTER CHARGING.

▶ **PROPRIETARY TECHNOLOGY**

PROPRIETARY PASTE FORMULA AND GRID DESIGN ARE THE BUILDING BLOCKS THAT SET FULL THROTTLE APART.

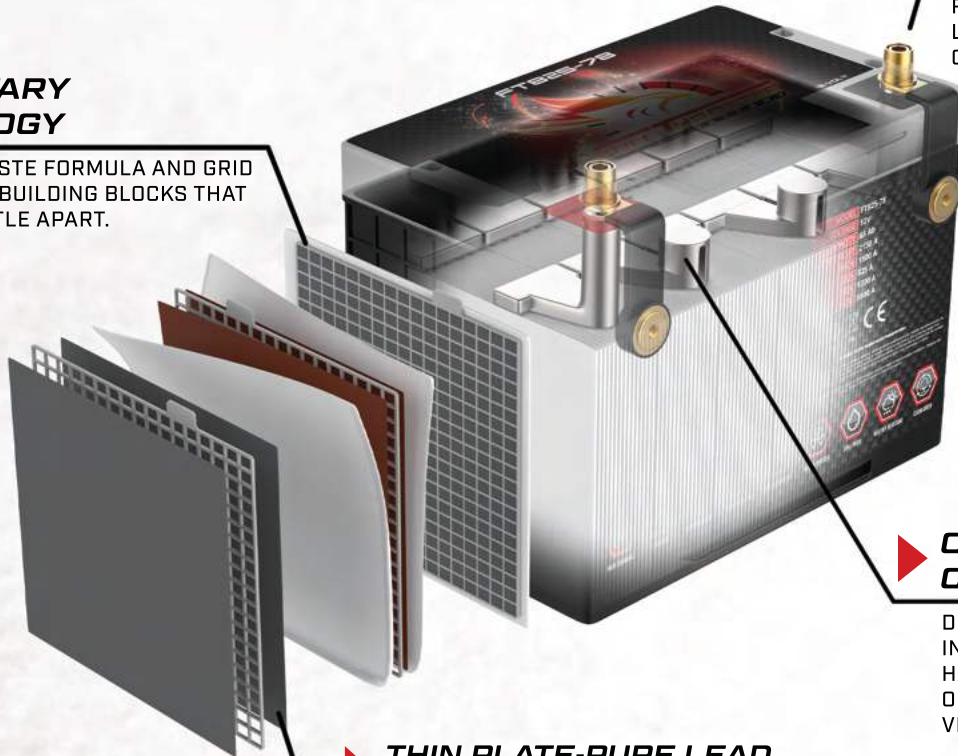

▶ **OVER-THE-PARTITION CELL CONNECTION**

DESIGN THAT ENSURES INDIVIDUAL BATTERY CELLS HAVE A REDUCED LIKELIHOOD OF SHORTS FROM SHOCK AND VIBRATION.

▶ **THIN PLATE-PURE LEAD TECHNOLOGY (TPPL)**

99.994% PURE LEAD IN OUR THIN PLATE PURE LEAD EQUATES TO MORE PLATES IN A GIVEN SPACE, RESULTING IN EXTENDED BATTERY LIFE AND INCREASED POWER.



NON-SPILLABLE



NON-HAZARDOUS



MAINTENANCE-FREE



ANTI-CORROSIVE



HIGH CAPACITY



LONG LIFESPAN



HIGH CRANKING



WEATHER-RESISTANT



99% RECYCLABLE



FULL THROTTLE SERIES

BATTERY MODEL	GROUP SIZE	CCA	PHCA	HCA	CA	Cap. C20	Res. Cap. @25 (min)	POSITIVE TERM. POSITION	TERM. TYPE	DIMENSIONS				WEIGHT (Lb/Kg)
										LENGTH	WIDTH	HEIGHT	TOTAL HEIGHT	
FT100	BTX9-BS	100	310	200	155	8	8	LHP	M6	5.43 (138)	3.39 (86)	4.02 (102)	4.02 (102)	7.1 (3.2)
FT185	BTX15L-BS	185	545	300	240	14	15	RHP	M6	6.97 (177)	3.39 (86)	5.16 (131)	5.16 (131)	10.8 (4.9)
FT200	B16L-B	200	535	300	265	14	20	RHP	M6M	6.69 (170)	3.90 (99)	6.18 (157)	6.18 (157)	13.2 (6.0)
FT230	BT198L-BS	230	680	410	310	20	28	RHP	M6	7.13 (181)	3.03 (77)	6.57 (167)	6.57 (167)	15.4 (7.0)
FT230-D	BT198L-BS	180	500	290	240	22	22	RHP	M6	7.13 (181)	3.03 (77)	6.57 (167)	6.57 (167)	13.9 (6.3)
FT265	B16CL-B	265	625	440	350	18	26	RHP	M6	6.69 (170)	3.90 (99)	6.89 (175)	6.89 (175)	15.7 (7.1)
FT410	-	410	925	625	530	28	48	RHP	M6 + TP26	6.50 (165)	6.93 (176)	4.92 (125)	5.67 (144)**	23.2 (10.5)
FT410L	BTX30L	410	925	625	530	28	48	LHP	M6 + TP26	6.50 (165)	6.93 (176)	4.92 (125)	5.67 (144)**	23.2 (10.5)
FT438-U1	U1	438	975	605	525	35	50	LHP	M6 + TP26	7.72 (196)	5.16 (131)	6.57 (167)	7.56 (192)**	25.1 (11.4)
FT438-U1R	U1R/46A24L	438	975	605	525	35	50	RHP	M6 + TP26	7.72 (196)	5.16 (131)	6.57 (167)	7.56 (192)**	25.1 (11.4)
FT560	26R	560	1200	860	725	44	80	RHP	M6 + TP26	7.80 (198)	6.54 (166)	6.69 (170)	7.09 (180)**	33.3 (15.1)
FT560L	26	560	1200	860	725	44	80	LHP	M6 + TP26	7.80 (198)	6.54 (166)	6.69 (170)	7.09 (180)**	33.3 (15.1)
FT610-47	47/L2/H5	610	1280	890	745	50	105	RHP	AP	9.49 (241)	6.89 (175)	7.48 (190)	7.48 (190)	42.1 (19.1)
FT620-51	51	620	1300	890	745	55	100	LHP	M6 + TP28	9.02 (229)	5.43 (138)	8.19 (208)	9.06 (230)**	40.3 (18.3)
FT680-48	48/L3/H6	680	1320	975	810	60	120	RHP	AP	10.94 (278)	6.89 (175)	7.48 (190)	7.48 (190)	47.8 (21.7)
FT750-25	25	750	1400	1080	900	64	120	LHP	AP	9.45 (240)	6.85 (174)	7.95 (202)	8.66 (220)	48.1 (21.8)
FT750-35	35/34R	750	1400	1080	900	64	120	RHP	AP	9.45 (240)	6.85 (174)	7.95 (202)	8.66 (220)	48.1 (21.8)
FT825-34	34	825	1500	1200	1000	65	135	LHP	M6 + TP28	10.28 (261)	6.77 (172)	7.17 (182)	8.19 (208)**	46.0 (20.9)
FT825-78	34/78	825	1500	1200	1000	65	135	LHP	M6 + FR45	10.28 (261)	6.77 (172)	7.17 (182)	8.31 (211)	46.0 (20.9)
FT840-24M	24M	840	1650	1200	1050	75	163	LHP	DT	10.87 (276)	6.77 (172)	8.15 (207)	8.95 (227)	54.0 (24.5)
FT840-24F	24F	840	1650	1200	1050	75	163	RHP	AP	10.87 (276)	6.77 (172)	8.15 (207)	8.95 (227)	54.0 (24.5)
FT850-94R	94R/L4/H7	850	1888	1200	1070	85	175	RHP	AP	12.36 (314)	6.85 (174)	7.48 (190)	7.48 (190)	55.7 (25.3)
FT890-49	49/L5/H8	890	1800	1300	1070	80	168	RHP	AP	13.90 (353)	6.89 (175)	7.48 (190)	7.48 (190)	60.4 (27.4)
FT930-65	65	930	1750	1350	1070	75	142	LHP	M6 + TP28	11.81 (300)	7.17 (182)	6.65 (169)	7.24 (184)**	54.9 (24.5)
FT965-27	27	965	1950	1380	1170	100	205	LHP	DT	12.09 (307)	6.65 (169)	8.43 (214)	9.33 (237)	69.5 (31.5)
FT965-27F	27F	965	1950	1380	1170	100	205	RHP	DT	12.09 (307)	6.65 (169)	8.43 (214)	9.33 (237)	69.5 (31.5)
FT1100-31	31A	1100	2200	1560	1360	110	230	RHP	M6 + TP28	12.99 (330)	6.81 (173)	8.31 (211)	9.33 (237)**	75.2 (34.1)
FT1100-31ST	31T	1100	2200	1560	1360	110	230	RHP	3/8" Stud	12.99 (330)	6.81 (173)	8.43 (214)	9.13 (232)	75.2 (34.1)
FT1150-6T	6TL	1150	2250	1700	1450	120	273	RHP	M6 + TP28	11.02 (280)	10.43 (265)	8.11 (206)	8.86 (225)**	85.8 (38.9)
FT1250-4DLT	4DLT/D5	1250	2200	1720	1500	175	340	LHP	M6 + TP28	20.20 (513)	8.78 (223)	7.75 (197)	8.74 (222)**	123.5 (56.0)
FT1450-80	80	1450	2400	1950	1700	225	450	RHP	M6 + TP28	20.35 (517)	10.79 (274)	8.58 (218)	9.57 (243)**	161.2 (73.1)

TIP: USE THE BATTERY FINDER ON OUR WEBSITE TO HELP DETERMINE THE BEST FITTING FOR YOUR VEHICLE.

** Brass SAE post is removable reducing total height by 0.86"





FULL THROTTLE[®]

BATTERY

ISO
CERTIFIED
DELIVERY APPROVED!
LAND, SEA, & AIR

9001:2008 CERTIFIED / Quality Management System
14001:2004 CERTIFIED / Environmental Management System
18001:2007 CERTIFIED / Occupational Health & Safety Management System

Fullriver batteries are sealed lead-acid batteries made with Absorbed Glass Mat (AGM) or GEL technology. The electrolyte is absorbed into the fiberglass (or gel) separator material rather than in a free-flowing liquid form. Fullriver batteries are non-spillable, electric storage batteries. Fullriver batteries are excepted from the requirements of DOT's hazardous materials regulations since Fullriver batteries adhere to the requirements of Code 49 CFR Section 173.159(D).
CLASSIFIED APPROVED: DOT, CFR, HMR49, IATA, ICAO67, IMDG27

fullthrottlebattery.com

